

Mono-crystalline Solar PV Modules

M210

60W

ZJNAC-60M

Mono Single Glass Module

18.8%

Module efficiency

Electrical Specifications

Module Type		ZJNAC-60M	
STC: AM1.5 Temperature 25°C Irradiance 1000 W/m ²	Peak Power(Pmax)±3%	(W)	60
	Power Tolerance	(W)	0~+5
	Max.Power Voltage(Vmp)	(V)	20.34
	Max.Power Current(Imp)	(A)	2.95
	Open-circuit Voltage(Voc)±3%	(V)	23.96
NMOT: AM1.5 Temperature 20°C Wind speed 1m/s Irradiance 800 W/m ²	Short-circuit Current(Isc)+3%	(A)	3.18
	Peak Power(Pmax)±3%	(W)	44.9
	Max.Power Voltage(Vmp)	(V)	19.59
	Max.Power Current(Imp)	(A)	2.29
	Open-circuit Voltage(Voc)	(V)	23.37
Short-circuit Current(Isc)	(A)	2.43	
Operating Temperature	(°C)	-40~+85	
Max. Series Fuse Rating	(A)	15	
Max. System Voltage(DC)	(V)	1000(IEC)	

Mechanical Specifications

Solar Cells	N-Mono-210*35mm
Arrangement	Type-2*18
Front Glass	3.2mm tempered glass
Backsheet	Fluoride on both sides
Frame	Anodized aluminium alloy
Junction Box	IP67, 1 diode
Cables	2.5mm ² photovoltaic cables
Connectors	MC4 compatible/IP67
Maximum Load Capacity	Snow-3600Pa/Wind-1600Pa
Safety Rate	Class II (IEC)
Fire Rate	Class C (TUV)


Packing Configuration

Package Weight & Size	3.7Kg/carton & 712*467*33mm		
20'GP Container	1 pcs/carton	2551 cartons/20'GP	2551 pcs
40'HQ Container	1 pcs/carton	6288 cartons/40'HQ	6288 pcs

Dimensions of PV Module

Module Dimensions 700(±2)*455(±2)*25mm


Module Weight 3.2 kg(±3%)

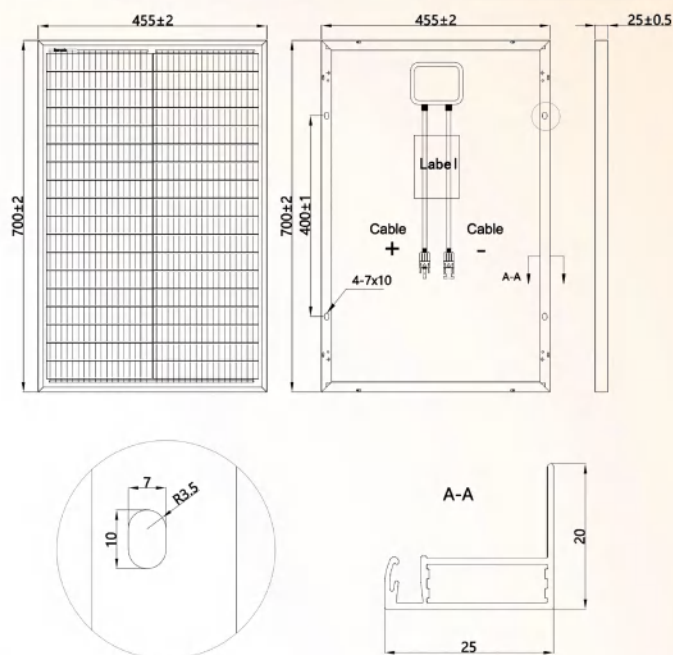


Temperature Characteristics

Temperature Coefficient (Pmax)	δ[%/°C]	-0.36
Temperature Coefficient (Voc)	β[%/°C]	-0.30
Temperature Coefficient (Isc)	α[%/°C]	+0.046
Nominal Operating Cell Temperature	NMOT	44°C±2°C

I-V & P-V Curves

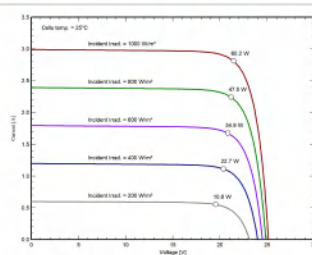

Current-Voltage Characteristic



Power-Voltage Characteristic

Configuration	Default	Choose
Frame Color	<input checked="" type="checkbox"/> Silver	<input type="checkbox"/> Black
Backsheet Color	<input checked="" type="checkbox"/> White	<input type="checkbox"/> Transparent <input type="checkbox"/> Black
Cable Length	<input checked="" type="checkbox"/> 900mm	<input type="checkbox"/> Customization
Connectors	<input checked="" type="checkbox"/> Compatible MC4	<input type="checkbox"/> Original EVO2



ZHEJIANG G&F FOREIGN TRADING COMPANY LIMITED
NINGBO ZHONGYI NEW ENERGY CO., LTD.

Company Address : No. 308 North Zhongshan Road, Hangzhou, Zhejiang
Factory Address : No. 509 Zhengtong North Road, High-tech Industrial Development Zone, Cixi, Zhejiang

Tel:+86-0571-85773914

Mob:+86-13705717473

E-mail:yangchuang@zjnac.com

Web:www.zjnac.com