



# ESPHSC555

## Monocrystalline Half-Cut Solar Module

### KEY FEATURES



**MBB Half-Cut Solar Cell:**  
144 cells (6X24); 10/11 busbar solar cell.



**Higher Module Conversion Efficiency:**  
Higher module output up to 555W with module efficiency up to 21.5%.



**Low-light Performance:**  
Advanced glass and surface texturing allow for excellent performance in low-light environments.



**Light-weight design**  
Light-weight design using transparent backsheets for easy installation and low BOS cost.



**Higher Power Output**  
Module power increases 5-25% generally, bringing significantly lower LCOE and higher IRR.

182



**+** WATTS POSITIVE TOLERANCE

**15** YEARS PRODUCT WARRANTY

**25** YEARS LINEAR POWER WARRANTY

### 182mm SERIES, 72-CELL HALF-CUT SERIES

#### ELECTRICAL PERFORMANCE

Module type: ESPHSC	555M
Maximum Power(Wp)	555W
Open circuit Voltage(Voc)	50.02V
Short circuit Current(Isc)	14.07A
Maximum Power Voltage(Vm)	42.11V
Maximum Power Current(Im)	13.18A
Module efficiency	21.5%
Maximum Series Fuse	25A
Number of Diode	3
Standard Test Conditions	1000W/M <sup>2</sup> ,25°C,AM1.5
Maximum System Voltage	1500V/DC
Temperature-Coefficient Isc	+0.045%/°C
Temperature-Coefficient Voc	-0.275%/°C
Temperature-Coefficient Pmpp	-0.350%/°C
Operating Temperature	-40°C...+85°C
Load Capacity for the cover of the module (glass)	5400Pa(IEC61215)(snow)
Load Capacity for the front & back of the module	2400Pa(IEC61215)(wind)

#### ELECTRICAL PERFORMANCE (NOCT)

Module type: ERA-72HC	555M
Maximum Power(Wp)	420W
Open circuit Voltage(Voc)	46.85V
Short circuit Current(Isc)	11.21A
Maximum Power Voltage(Vm)	39.66V
Maximum Power Current(Im)	10.59A


#### MECHANICAL CHARACTERISTICS

Front cover (material / thickness)	low-iron tempered glass / 3.2mm
Backsheet (color)	TPT in white
Cell (quantity / material / dimensions)	144(6x24) / monocrystalline silicon
Frame (material / color)	aluminum hollow-chamber frame on each side anodized aluminum alloy / silver
Junction box (protection degree)	≥ IP68
Cables & Plug connectors	4mm <sup>2</sup> , 500mm in length
Module Dimensions (L / W / H)	2278x1134x30mm
Module Weight	27.2kg
Application class	Class A
Electrical protection class	Class II
Fire safety class	Class C


#### PACKING

Container Size	Units/Pallet (PCS)	Weight/Pallet (KG)	Pallet Measurement (mm)	Units/Container (PCS)
40HQ	36	996	2285x1130x1260	720

#### CURRENT-VOLTAGE CURVES:

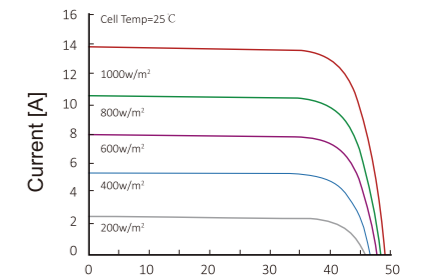

Module characteristics at constant module temperatures of 25°C and variable levels of irradiance

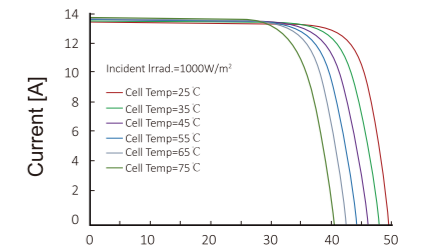

Module characteristics at variable module temperatures and constant module irradiance of 1.000 W/m<sup>2</sup>

#### MODULE DIAGRAM:

